



# Measurement of Surface Resistivity in Carrier Tape

**A Guide for Determining How to Measure**

An ECIA Knowledge Document

Volume 1, Number 5

October 2015

Reaffirmed: June 2023



## NOTICE

ECIA Knowledge Documents are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such documents shall not in any respect preclude any member or nonmember of ECIA from manufacturing or selling products not conforming to the documents, nor shall the existence of such documents preclude their voluntary use by those other than ECIA members, whether the document is to be used either domestically or internationally.

ECIA does not assume any liability to any patent owner, nor does it assume any obligation whatever to parties adopting the Document.


This Document does not purport to address all safety problems associated with its use or all applicable regulatory requirements. It is the responsibility of the user of this Document to establish appropriate safety and health practices and to determine the applicability of regulatory limitations before its use.

This ECIA Knowledge Document was formulated under the cognizance of the Automated Component Handling Standards Committee.

Published by

©2023 Electronic Components Industry Association  
EIA Standards & Technology Department  
13873 Park Center Road, Suite 315  
Herndon, VA 20171


The measurement of Surface Resistivity in carrier tapes is done in many different ways, based on the user's equipment, pocket sizes and shapes, and company policies and practices. Some of the twin probe methods are shown below

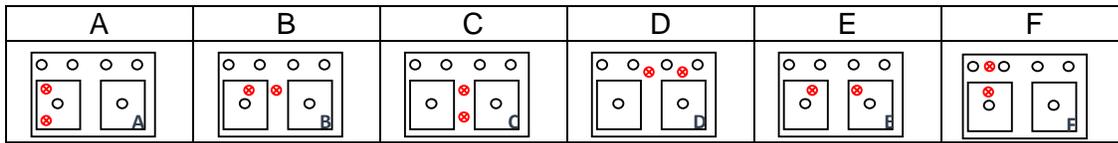


This methods will potentially get different results depending on the amount of stretch needed to form he pocket, the method use to form the tape, and the type of material used.

### Measurement principle

To measure the surface resistance in carrier tape samples, the equipment supplies a current (I) that passes through one probe, then through the sample, through the other probe, then back to the meter, completing the loop. The voltage drop (V) and the current supplied can be measured by built-in volt-meter and ammeter, then the resistance (R) is computed by Ohm's Law. Resistivity ( $\rho$ ) is then calculated using the probe geometry (usually,  $\rho=10*R$ ).

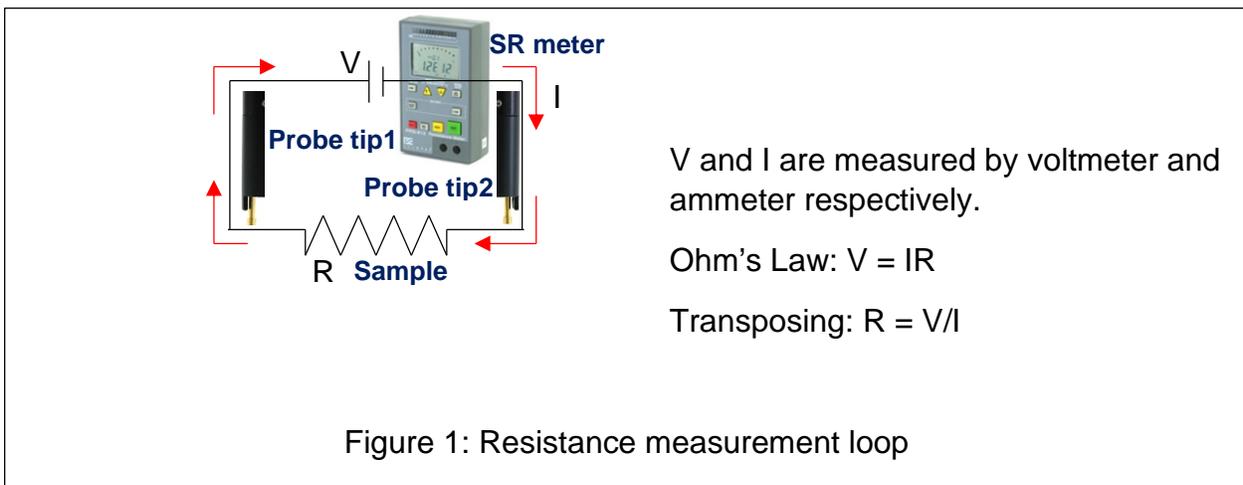

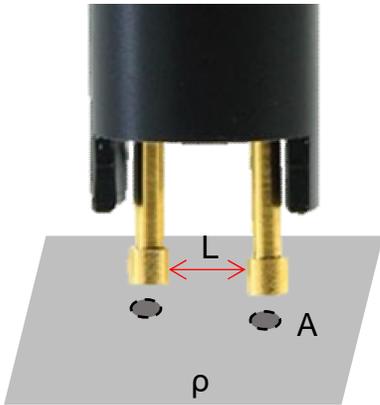

Extending Ohm's Law, interactions between the equipment and measured sample can be summarized by the following equation:

$$R = \frac{\rho \cdot L}{A}$$

where

$\rho$  = resistivity constant of a material, which is constant if the temperature is constant

$L$  = length of the sample in the loop, which is just the same as the gap between probes

$A$  = transfer area of charges, or the area of contact between the probe and the sample

Figure 2: Factors controlling a material's resistance reading


The above is based on surface resistance ( $\Omega$ ), but can easily be converted to surface resistivity ( $\Omega/\text{sq}$ ). As defined in ANSI/ESD STM11.11 (Surface Resistance Measurement of Static Dissipative Planar Materials), to convert resistance from ohms to ohms per square (surface resistivity) multiply the reading results by 10 (or alternatively if reporting in scientific terms, increase by one full decade. Example: from  $1.0 \times 10^5 \Omega$  to  $1.0 \times 10^6 \Omega/\text{sq}$ ). See Figure 3

Designation	Resistance (Ohms)		Resistivity (Ohms/Sq)	
	Standard	Exponential	Standard	Exponential
Shielding $<10^3$	10	$10^1$	100	$10^2$
	100	$10^2$	1000	$10^3$
Conductive $<10^4$	1000	$10^3$	10000	$10^4$
	10000	$10^4$	100000	$10^5$
Dissipative $\geq 10^4$ to $<10^{11}$	100000	$10^5$	1000000	$10^6$
	1000000	$10^6$	10000000	$10^7$
	10000000	$10^7$	100000000	$10^8$
	100000000	$10^8$	1000000000	$10^9$
	1000000000	$10^9$	10000000000	$11^{10}$
	10000000000	$11^{10}$	100000000000	$11^{11}$
Insulative $\geq 10^{11}$	100000000000	$11^{11}$	1000000000000	$11^{12}$
	1000000000000	$11^{12}$	10000000000000	$11^{13}$

Figure 3: Resistance and Resistivity

Carrier tape used for active (or ESD-sensitive) devices must have the ability to inhibit accumulation of, or to dissipate, electric charges at a certain rate. The selected testing method should be able to capture this ability reasonably.

As the floor of the pocket seats the device, the measurement method should show if charges from this area can be dissipated well (Figure 4).

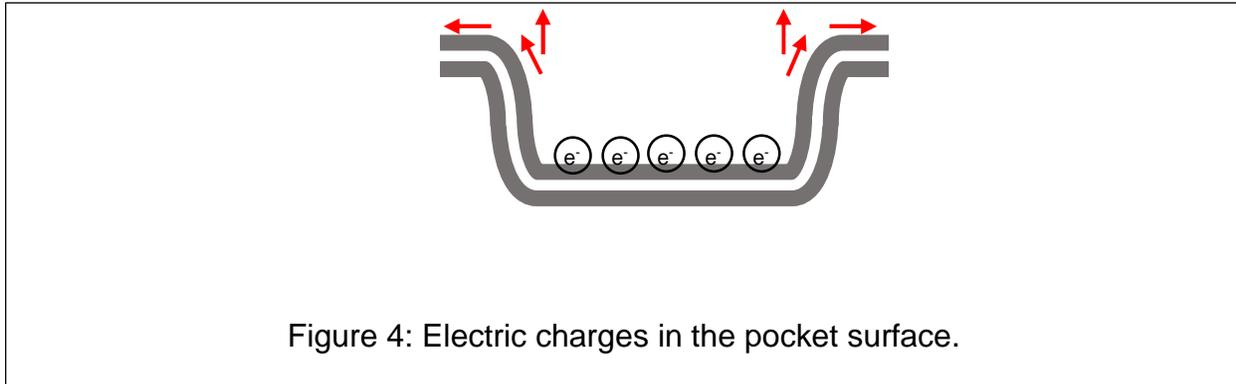

As shown in Figure 4, the path of charge dissipation that is most important is along the top-side surface of the planar material.

In summary, any test method must:

- Show if connection is established from pocket floor to a grounding location.

- Measure the top side surface, which is the one in direct contact with the device.

For consistency from one measurement to the next, the following recommendations are being made

Utilize a 2-point, spring loaded probe such as PRF-922B miniature probe. These generally can fit into a pocket at least 5mm wide and up to a depth of 4mm.

To best meet the requirements, test locations B and F are recommended. Since the charges will flow in the path of least resistance, the location (either B or F) that provides a smaller resistance result will more accurately indicate the charge dissipation path.

In cases where a probe tip is too large to fit the pocket or the pocket is deeper than 4mm (limit of the probe depth) method C or D may be applied. The reason is that draw ratios and material stretch for such pocket sizes are small and would not significantly

increase the surface resistance. It is also best to avoid measuring over or across a punched hole.

The chart in Figure 5 shows the recommended measurement locations in the preferred order.






Recommended test locations	1. SR is measured along a dissipation path. The first choice in location is from pocket bottom to bridge (if wide enough), other wise move to location 2	
	2. Measure from pocket bottom to flange. If unable, move to location 3	
	3. Measure across the pocket bottom. Avoid measuring across the pocket hole if possible. If unable, move to location 4	
	4. If 1-3 cannot be done, such as in very small pockets, but the bridge width is 3.5mm or more (probe tip diameter = 3.18mm), it is recommended to measure on the bridge.	
	3. If 1 -4 cannot be done and bridge width is less than 2.6mm, it is recommended to measure in the sealing area, avoiding the sprocket holes if possible	

Figure 5: Recommended test locations for standardization